UV-C FLOW GERMICIDAL LAMPS Veries NBVE UV-C AIR PURIFIERS







Polska

No. of Concession, Name

CERTIFICATE TUNNORD

in Düsseldorf

Arab Health Fair in Dubai 2014



Salmed Fair 2014 in Poznań

UltraViol is a dynamically developing company manufacturing medical equipment. We have been established in 1993.

We offer wide range of X-ray film viewers, including LED modern line, flow and direct radiation germicidal lamps and SAD phototherapy light Fotovita.

Our latest product offer includes the digital and analog images viewing stations, Breis /Ultraviol/ Pacs diagnostic console and Dermalight

Our company is continuously improving modernizing their design and quality.

The medical equipment manufactured by our company complies with the requirements of 93/42/EEC (with amendments according to 2007/47/EC) and 2004/108/WE Directives, devices and EN 60601-2 standard concerning electromagnetic compatibility of the products.

To confirm the fact that ULTRA-VIOL meets of medical devices, the company obtained ISO 9001 and ISO 13485 certificates granted by TUV NORD CERT GmbH, Essen, Germany.

Our equipment is used by all the best clinics and hospitals in Poland. We export the products to most of the European countries and many other countries all over the world.

The main provider of light sources and power systems, which have a great impact on the high quality of our equipment, is PHILIPS, OSRAM the worldwide leaders in light technology.

Technological processes used in our production are environmentally friendly.

The detailed information and technical data of our products are available in catalogues and on our website www.ultraviol.pl.

We invite you to become our business partner.

Ultraviolet radiation (UV) is a part of electromagnetic spectrum similar to X-radiation, radio waves or visible light.

For practical purposes the ultraviolet radiation has been divided into three bands:

UV-A - long-wave band UV-B - medium-wave band UV-C – short-wave band

400 nm – 315 nm 315 nm – 280 nm 280 nm – 100 nm

UV-A radiation is contained in radiant energy from the sun. It activates photochemical and pigment-creating processes. Its erythemal effect is of no importance.

UV-B radiation is used mainly in theraphy. It creates provitamin D and causes both pigmentation and erythemal effect.

Bactericidal effectiveness of UV-C radiation

Microorganisms being exposed to UV-C radiation are inactivated. This effect is known as a germicidal effect, and as it was confirmed by tests, the radiation at wavelength ranging from 250 nm to 270 nm is of the greatest germicidal effectiveness. The germicidal effect of the UV-C radiation is the result of the photochemical reaction due to absorption of photons by nucleic acids of the cells, which affect on DNA of microbial cells. Since it is short-wave UV radiation it is also high- energy radiation. The energy of photons absorbed by nucleic acids interrupts the molecular bonds of DNA and causes formation of pyrimidine dimers. This results in inactivation of DNA and RNA of the microorganisms.

Benefits of UV-C flow germicidal lamps

- Provide possibility of intense air disinfection in the presence of patients and medical staff (flow UV-C chamber).
- Irreversibly destroy bacteria, viruses, fungi and other airborne microorganisms.
- Reduce the risk of secondary infections of the hospitalized patients, particularly postoperative infections.
- The lamps form a kind of barrier, effectively protecting people against development and spread of infections.
- Improve the quality of the inhaled air.
- Reduce the need to use chemicals without causing any chemical contamination.
- Microorganisms do not acquire resistance to UV-C radiation.
- UV-C radiation acts here and now without leaving any signs of its application.
- In more complex cases of disease, they reduce the risk of infection of people with reduced immunity
- Reduce the risk of hospital-acquired infections
- Minimize the number of the strains resistant to antibiotics
- High effectiveness of the method, also in case of drug-resistant strains
- Low operating costs energy efficiency
- Easy to use.

C 100% 60% 20% C 220nm 240nm 260nm 280nm 300nm 320nm

A

В

C

the greatest germicidal effect is obtained with the UV-C radiation within the wavelength region from 250 to 270 nm


curve of absorption of nucleic acids

cosmic radiation by discharge in low-pressure mercury vapour

- Medicine: operating theatres, treatment rooms, delivery wards, dentists,
- emergency departments, patient wards, sluice rooms, consulting rooms, ambulatories, corridors etc.
- Veterinary clinics
- Sanatorium, quest houses
- Laboratories
- Food industry (food processing and storage)
- Pharmacies
- Pharmaceutical industry, herbal industry
- Cosmetic industry
- Waiting rooms •
- Stations, hotels, cinemas, disco, shops, nurseries, infant schools etc.
- In all places where high level of microbiological purity is required and at the same time people have to stay there.

AREAS PARTICULARLY EXPOSED TO INFECTIONS

concentration of sick and infected people and staff
rooms equipped with sophisticated equipment, difficult to sterilize or disinfect
rooms equipped with devices being used by groups of people

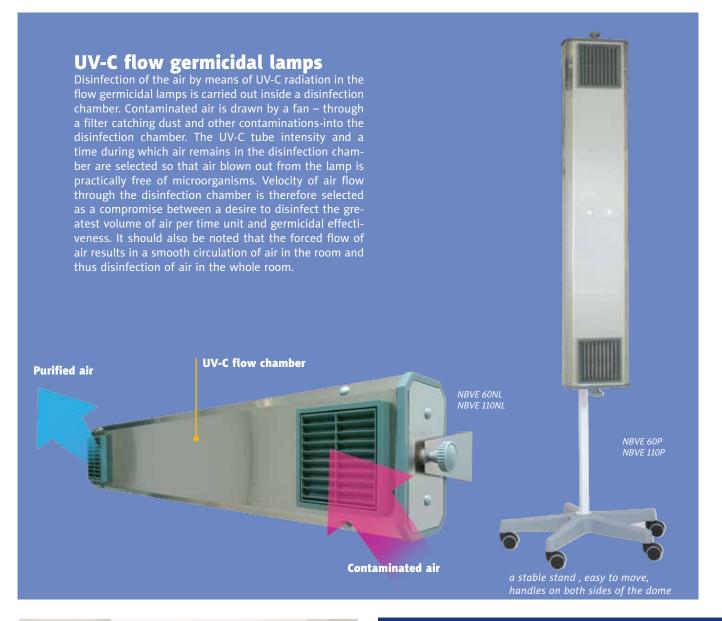



One of the important advantages of flow UV-C germicidal lamps with forced air flow is a possibility of their use in the presence of personell and patients (permanent disinfection of the air)



Process of the air treatment with the use of internal UV-C tubes (air)

FLOW GERMICIDAL LAMPS SERIES NBVE UV-C AIR PURIFIERS

Dual-function UV-C flow germicidal lamps 2-function flow germi-cidal lamps with an external radiator of direct action guarantee a full range of disinfectant action. It gives a possibility of intensive disinfection of the air in the presence of people (UV-C flow chamber – function I) and direct disinfection of the whole room when the personell and patients stay outside the room (UV-C direct radiation tube - function II). Disinfectant action of the external radiator is similar to standard germicidal lamps NBV series. UV-C radiation disinfects the air and surfaces in the room (walls, table tops, objects, etc.) Thanks to its nature it also reaches different nooks as reflected light. Both functions are independent of each other. Function I **UV-C flow chamber Purified** air Inductive counter with display NBVE 60/30PL NBVE 110/55PL Contaminated air UV-C direct radiation tube



Contaminated air in the room without germicidal lamps



Process of the air treatment with the use of internal and external UV-C tube (air and surfaces)

SECURITY, RELIABILITY, SAFETY, COMFORT

NBVE



Modern and durable materials guarantee effectiveness and no failure.Replacement of the filter is possible to be done without the use of tools. Types of housing:


- stainless steel (INOX)
- coated aluminium sheet
- coated carbon steel sheet
- any RAL color available on request custom mounting elements available on request
- **Mounting options:**
- ceiling-mounted (S, SL) ٠
- wall-mounted (N, NL)
- on mobile stand (P, PL)

Options with working time counter are marked with "L".

NBVE 60 NL



of the iridiation with the use of counter indicates 0

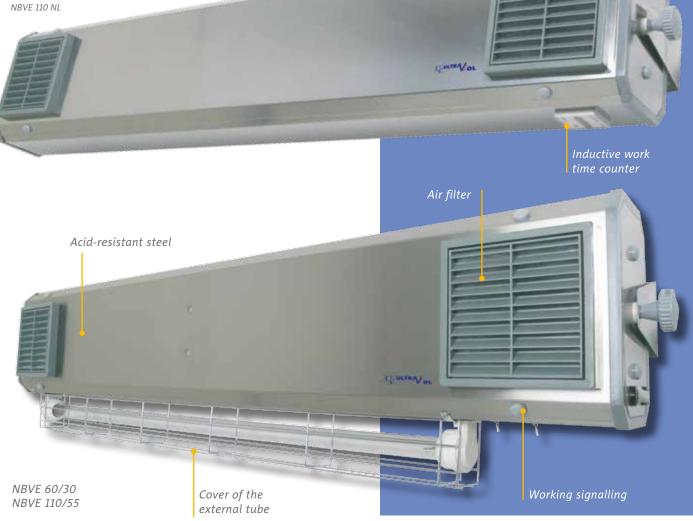

TECHNICAL DATA SERIES NBV

Lamp type	NBVE 60	NBVE 110	NBVE 60/30	NBVE 110/55
Supply voltage	230 V, 50 Hz	230 V, 50 Hz	230 V, 50 Hz	230 V, 50 Hz
Power requirement	75 VA	115 VA	105 VA	145 VA
UV-C tube PHILIPS or OSRAM	2 x 30 W	2 x 55 W	2 x 30 W internal	2 x 55 W internal
			1 x 30 W external	1 x 55 W external
Lifetime of UV-C tube	min. 8000 h	min. 8000 h	min. 8000 h	min. 8000 h
Radiation intensity of the external UV-C radiator at the distance of 1 m	-	_	100 µW / cm²	150 μW / cm²
Ventilator capacity	132 m ³ /h	199 m³ /h	132 m ³ /h	199 m ³ /h
Cubage of disinfected room	25-50 m ³	45-90 m ³	25-50 m ³	45-90 m ³
Effective area of the lamp	10-20 m ²	18-36 m ²	10-20 m ²	18-36 m ²
Class of protection against electric shock	I	1	I	l
Cover type	IP 20	IP 20	IP 20	IP 20
Dimensions [mm] :				
Dome	1125x215x130		1125x285x130	
Overall dimensions – N making (wall mounted)	1190x215x145		1190x285x145	
Overall dimensions – S making (ceiling mounted)	1190x330x130		1190x400x130	
Overall dimensions – P making (mobile)	600x1740x600		600x1740x600	
Mass - N making (wall mounted)	8,5 kg	9,0 kg	9,0 kg	9,5 kg
Mass - S making (ceiling mounted)	8,5 kg	9,0 kg	9,0 kg	9,5 kg
Mass - P making (mobile)	13,0 kg	13,5 kg	13,5 kg	14,0 kg

We select the number of UV-C flow germicidal lamps taking the cubage of the room into consideration – look at the table above. ULTRA-VIOL fullfills untypical orders as well. The producer reserves the right to innovate in the construction relevant the improvement of the manufacture.

FLOW GERMICIDAL LAMPS ARE STANDARDLY EQUIPPED WITH WORKING TIME COUNTER WITH DISPLAY



Inductive counter L



Counter LW Digital counter LW with microprocessor with the display 4 field LED. Acoustic signaling the moment of exchange uv bulbs.



Counter L-02 External digital counter the time of the work to germicidal lamps with switch and display 4 field LED. Programmable LP-02

External digital counter

time.1,2,4 or 8 working

4 -digits LCD displayer

and programmer of UV-C

germicidal lamps working

hours, operation key switch,


Counter LW ST Counter LW, ON/OFF key switch



Counter LW SK Counter LW, ON/OFF key switch, illumimated indicator



The manufacturer ULTRA-VIOL Sp.j. provide advise and consultation on the use of UV-C germicidal lamps.

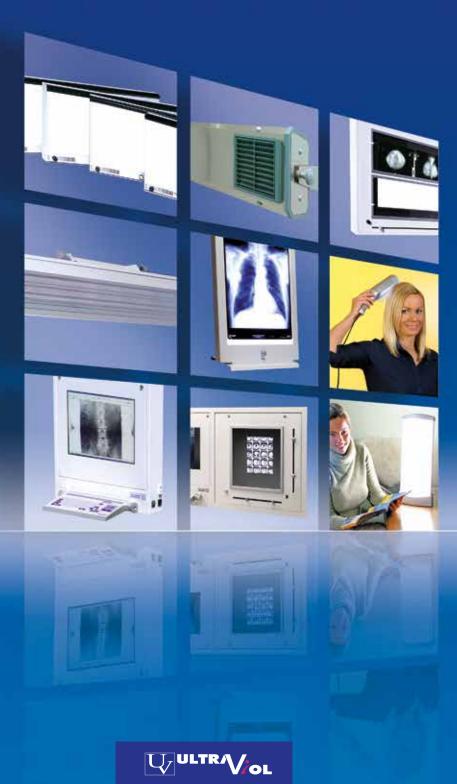

ULTRAVIOL® Sp. j. PIETRAS, PURGAŁ, WÓJCIK

34 Stępowizna Str., 95-100 Zgierz POLAND tel.: (+48 42) 717 11 76, 717 19 59, 715 00 92, fax: (+48 42) 715 02 16, NIP: PL7270021903 e-mail: biuro@ultraviol.pl www.ultraviol.pl www.ultraviolsklep.pl