




TECHNICAL DATA SHEET

GERMIPROTECT series

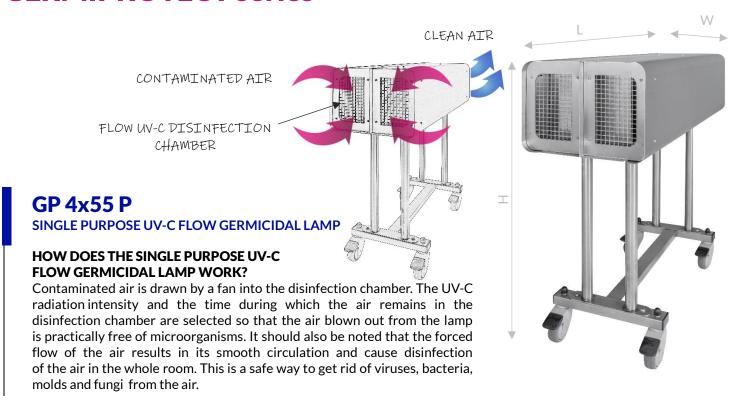

BASIC DATA:

2, 6, 6, 2, 1, 1, 1	
Air flow disinfection function (flow disinfection chamber)	yes
Direct radiation function	no
Presence of people, animals, plants inside the room during disinfection process	allowed
Mounting type	on mobile stand
Mounting on four-wheel acid-proof steel stand	yes (provides stability)
Working time counter	no
External bulbs	no
Casing material*	acid-proof steel
Anti-dust filters	no
Switch on/off	built in lamp body
Ambient temperature	+10°C to +40°C
Relative humidity	30% to 70%
Atmospheric pressure	700 hPa to 1060 hPa
Declaration of conformity	yes
User's manual English version	yes





TECHNICAL DATA SHEET

GERMIPROTECT series

GP 4x55 P

SINGLE PURPOSE UV-C FLOW GERMICIDAL LAMP

TECHNICAL DATA:

TECHNICAL DATA.	
Supply voltage	230 V, 50 Hz
Power consumption	240 W
UV-C bulbs (Philips/Osram)	4 x 55 W (PL-L TUV / HNS-L)
UV-C radiation wave-length	253.7 nm
Useful lifetime of the UV-C bulbs	min. 9000 h
Radiation intensity of the external UV-C tube at the distance of 1m	-
Fans capacity (2 fans inside the device)	260 m ³ /h
Device capacity	100 m ³ /h
Cubage of disinfected room	$250\mathrm{m}^3$
Effective area of the lamp	$100 \mathrm{m}^2$
Class of protection against electric shock	I
Ingress Protection Code	IP 20
Lamp body dimensions (L \times W \times H)	940 x 350 x 250 mm
Overall dimensions (L \times W \times H)	940 x 350 x 900 mm
Total lamp mass	29.5 kg
Power cord length	3 m, ended with the socket plug

APPLICATION RECOMMENDATIONS:

Hospitals **Food industry Pharmaceutical industry Cosmetics industry Outpatient clinics Medical laboratories** Herbal industry Chemist's **Vet cabinets**

HoReCa

- SPA hotels
- hotels
- restaurants
- catering/café

Ultra-Viol's realisation



Railway stations Cinemas

Large volume rooms