




TECHNICAL DATA SHEET NBV series

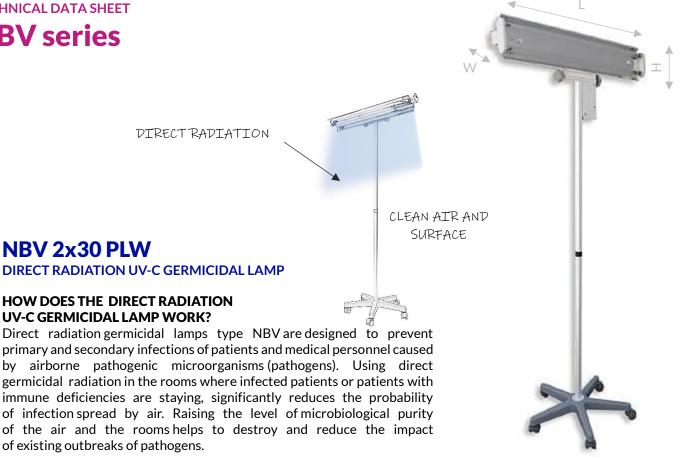

BASIC DATA:

no
yes
not allowed
on mobile stand
yes, the digital working time counter with 4-field LED display and acoustic signalling
yes, 2 bulbs
powder lacquered aluminum
high-quality reflective aluminum
built-in lamp body
+10°C to +40°C
30% to 70%
700 hPa to 1060 hPa
yes
yes

EDITION: 10/2022





TECHNICAL DATA SHEET

NBV series

NBV 2x30 PLW

DIRECT RADIATION UV-C GERMICIDAL LAMP

TECHNICAL DATA:

TECHNICAL DATA.	
Supply voltage	230 V, 50 Hz
Power consumption	66 W
UV-C bulbs (Philips/Osram)	2 x 30 W (TUV/HNS)
UV-C radiation wavelength	253.7 nm
The useful lifetime of the UV-C bulbs	min. 9000 h
The radiation intensity of the external UV-C tube at a distance of 1 \mbox{m}	$3.6\mathrm{W/m^2}$
The effective area of the lamp	18-22m ²
Exposure angle adjustment range	240°
Class of protection against electric shock	I
Ingress Protection Code	IP 20
Operation mode	continuous
Lamp body dimensions – without stand $(L \times W \times H)$	960 x 85 x 145 mm
Total lamp mass	8.6 kg
Height of the stand	180.0 cm
Power cord length	3.0 m, ended with the socket plug

APPLICATION RECOMMENDATIONS:

Hospitals

- operation theatres
- intensive care units
- emergency rooms
- examination and treatment rooms
- reception units
- patient rooms, isolation rooms
- soiled/dirty utility rooms

Outpatient clinics Medical laboratories Chemist's Beauty salons Pharmaceutical industry Food industry Cosmetic industry

Ultra-Viol's realisation

